


TLS-SMD-10F-RGB-60

Features:

- ➤ LED strip light, RGB color, Top LED type, Flexible, Water Proof
- Ultra brightness available
- PLCC6 top LED type
- > LED color: RGB color
- > LED service life: 50,000-100,000hrs
- Continuous length flexible LED light strips
- ➤ Input: 12VDC
- 60 pcs LEDs per Meter
- Working Current: 3A for RGB Color a reel
- Cut by every 3 LEDs
- Maintenance free, easy installation
- > Application: commercial, residential and industrial environments;
- Can be used as backlighting in decoration and advertisement; can be used in illumination devices
- Standard Length: 5 Meters/Reel
- Printed Circuit Board thickness: 0.2-0.25mm



	Chip					Luminous		
Part Number	Emitted Color	Material	l _P (n m)	Forward Voltage(VF) Unit:V		Intensity (Iv) Unit:mcd		viewi ng Angle 2?1/2(
				Тур	Max	Min.	Тур.	deg)
TLS-SMD-10F-RGB-	Ultra Red	AlGaInP	630	11.5	12.5	500	700	100
	Ultra Pure Green	InGaN	525	11.5	12.5	700	1000	
	Ultra Blue	InGaN	470	11.5	12.5	400	700	

■ Full set of LED strip picture








1 BE 1 1 X 2 X X

APPROVED: XU L CHECKED: ZHANG WH DRAWN: LI FS REV NO: V.2 Page 1 of 2 WWW.BETLUX.COM EMAIL: SALES@BETLUX.COM, SALES@BETLUX.COM

TLS-SMD-10F-RGB-60

PCB OUTLINE AND DIMENSION

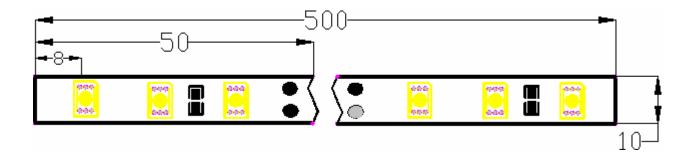

Notes:

- · All dimensions are in millimeters (inches)
- · Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- $\boldsymbol{\cdot}$ Specifications are subject to change without notice.

APPROVED: XUL CHECKED: ZHANG WH DRAWN: LIFS REV NO: V.2 Page 2 of 2 WWW.BETLUX.COM EMAIL: SALES@BETLUX.COM, SALES@BETLUX.COM