






THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS: ANGLE ± 1°
UNIT: MM .XX ± 0.35

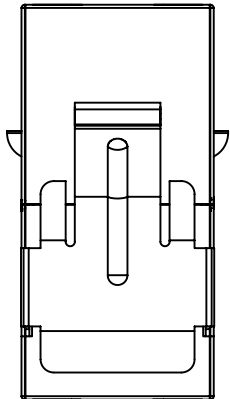

16.8

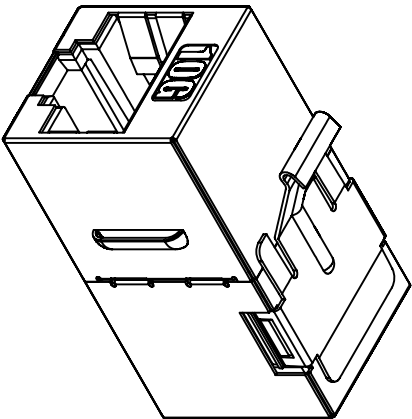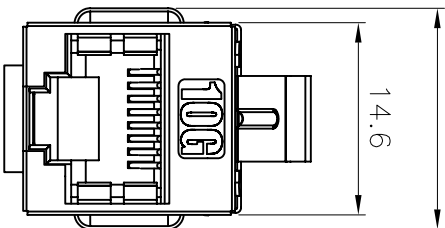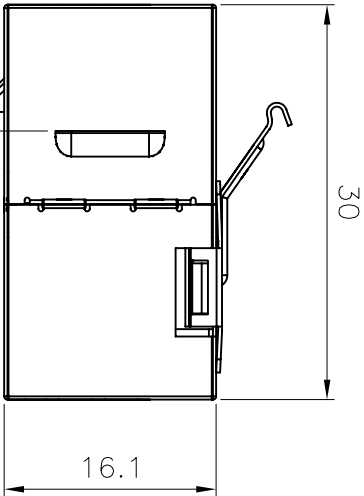

Electrical specification:

- Insulation resistance: 500MΩ
- Dielectric withstanding voltage: 1000V AC
- DC current rating: 1.5A
- DC resistance: 0.1Ω
- Contact resistance: 20mΩ

Physical specification:

- Shielded case: Stainless steel
- Coupler housing: polycarbonate resin high - impact UL94V-0 Thermoplastic
- Spring wire: phosphor bronze with Gold over Nickel undercoat
- Insertion life: 750 mating cycles with FCC compliant RJ45 plug
- Plug retention force: 11lbf min
- Operating temperature: -10°C to 60°C
- Humidity: 10%~90%RH

Standard Verification:

- ANSI/TIA-568-B-2-1-10 channel compliant
- FCC part 68.5, Subpart F compliant
- ISO/IEC 11801 Class EA channel compliant
- UL 1863


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN	DATE
Johnny	09-18-12
APPROVED	DATE

RJ45 FULLY SHIELDED COUPLER PANEL
MOUNTED CAT6A OFFSET PIN.

SCALE	SHEET	OF	REV:
	1	DF 1	1.0

DRAWING No
39-763635952



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR ROHS COMPLIANCY.

