


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs
- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Standardversjonen leveres med brolikeretter og kondensator
- Utskiftbare plugger




Technical specifications

Input voltage:
 Output voltage:
 Max. output power:
 Insulation class:
 Electrical safety standard:
 EMC standards
 • Emission:
 • Immunity:
 Output terminals
 Cord with/without plug:
 Dimensions excl. plug:
 Weight:

Tekniske data

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz
 Utgangsspenning: 2-48 VAC
 Maks. utgangseffekt: 2,5 VA
 Isolasjonsklasse: II
 Elektrisk sikkerhetsstandard: EN 60065, EN 60950
 EMC standarder
 • Emisjon: EN 61000-6-3
 • Immunitet: EN 61000-6-1
 Utgangsterminaler
 Sek. ledning med/uten plugg: Accessories /Tilbehør
 Mål uten plugg: 75 x 47 x 49 mm
 Vekt: 220 g

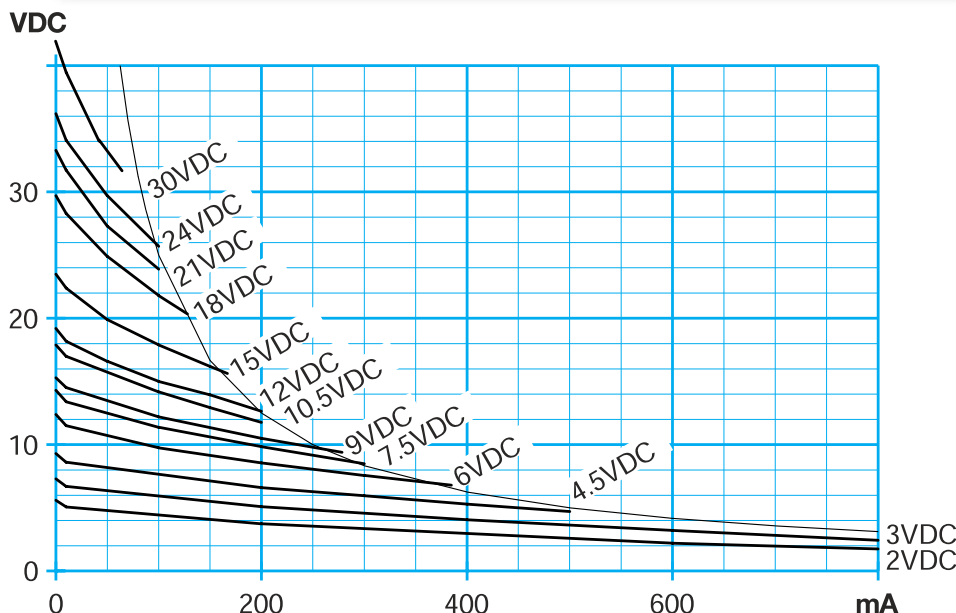

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
2	1,2
3	1,5
4,5	2,0
6	2,5
7,5	2,5
9	2,5
10,5	2,5
12	2,5
15	2,5
18	2,5
21	2,5
24	2,5
30	2,5
48*	2,5

*Not in diagram / * Ikke i diagram

48 V versjon: Tomgang:	59V
40mA:	48V
48 V versjon: No load:	59V
40mA:	48V