


- Plug-in unit
 - Fixed output voltages
 - Thermal fuse in transformer
 - Available as standard version with bridge rectifier and capacitor
 - Exchangeable output plugs
 - Approvals:
 - Complies w. medical std EN 60601 (on request)
- Plugg-inn enhet
 - Faste utgangsspenninger
 - Termosikring i transformator
 - Standardversjonen leveres med brolikeretter og kondensator
 - Utskiftbare plugger
 - Godkjenninger:
 - Tilfredsst. medisinsk std EN 60601 (på forespørsel)




Technical specifications

Input voltage:
 Output voltage:
 Max. output power:
 Insulation class:
 Electrical safety standard:
 EMC standards
 • Emission:
 • Immunity:
 Output terminals
 Cord with/without plug:
 Dimensions excl. plug (LxWxH):
 Weight:

Tekniske data

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz
 Utgangsspenning: 3-28 VDC
 Maks. utgangseffekt: 10 W
 Isolasjonsklasse: II
 Elektrisk sikkerhetsstandard: EN 60065, EN 60950
 EMC standarder
 • Emisjon: EN 61000-6-3
 • Immunitet: EN 61000-6-1
 Utgangsterminaler
 Sek. ledning med/uten plugg: Accessories /Tilbehør
 Mål uten plugg (LxBxH): 100 x 51 x 63 mm
 Vekt: 450 g

VDC

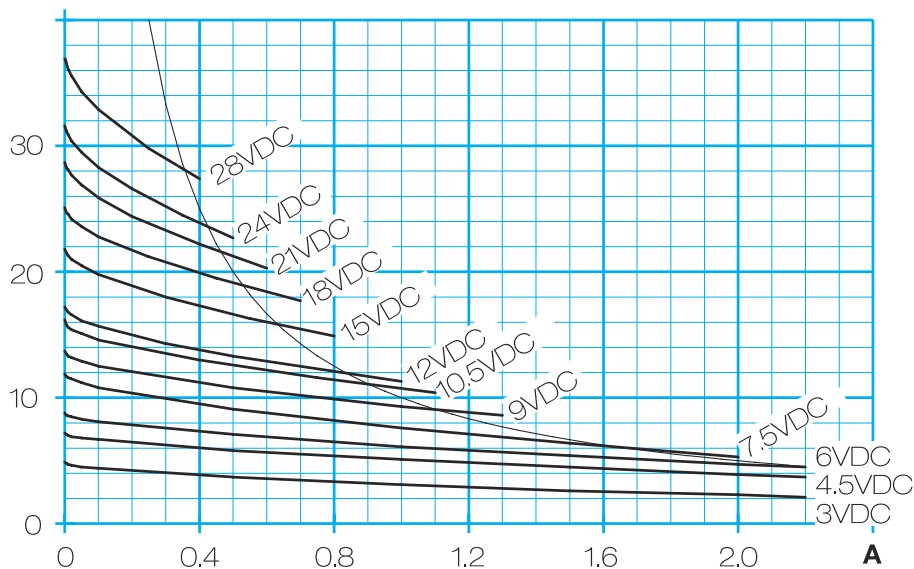

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
3	6,0
4,5	7,0
6	8,0
7,5	8,5
9	10,0
12	10,0
15	10,0
18	10,0
21	10,0
24	10,0
28	10,0