


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs
- Approvals:
  - Complies w. medical std EN 60601 (on request)

- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Standardversjonen leveres med brolikeretter og kondensator
- Utskiftbare plugger
- Godkjenninger:
  - Tilfredsst. medisinsk std EN 60601 (på forespørsel)




### Technical specifications

Input voltage:  
 Output voltage:  
 Max. output power:  
 Insulation class:  
 Electrical safety standard:  
 EMC standards  
 • Emission:  
 • Immunity:  
 Output terminals  
 Cord with/without plug:  
 Dimensions excl. plug (LxWxH):  
 Weight:

### Tekniske data

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz  
 Utgangsspenning: 3-28 VDC  
 Maks. utgangseffekt: 10 W  
 Isolasjonsklasse: II  
 Elektrisk sikkerhetsstandard: EN 60065, EN 60950  
 EMC standarder  
 • Emisjon: EN 61000-6-3  
 • Immunitet: EN 61000-6-1  
 Utgangsterminaler  
 Sek. ledning med/uten plugg: Accessories /Tilbehør  
 Mål uten plugg (LxBxH): 100 x 51 x 63 mm  
 Vekt: 450 g

VDC

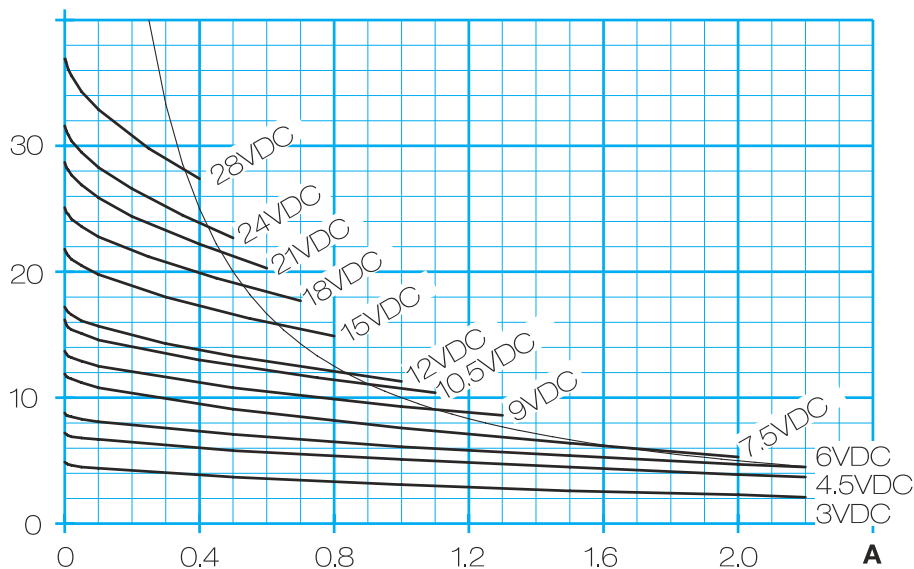

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
3	6,0
4,5	7,0
6	8,0
7,5	8,5
9	10,0
12	10,0
15	10,0
18	10,0
21	10,0
24	10,0
28	10,0