

USB TYPE-C RECEPTACLES - 6 PIN OPTION

Features:


- Up to 10 Gbps communication speed for USB 3.1 Type C
- Industry standard plug and play technology - 'Hot Pluggable'
- Compatible with synchronous and asynchronous data transfer
- Data and power combined in one small package
- RoHS compliant



Specifications:

Insulator Material	Thermoplastic UL-94V-0
Contact Material	Copper alloy
Contact Plating	Nickel under plating with Gold plating on contact areas
Shell Material	Stainless Steel with Nickel plating
Insertion Force	5~20N
Withdrawal Force	8~20N

EXAMPLE PART NUMBER: 698A106W282-611

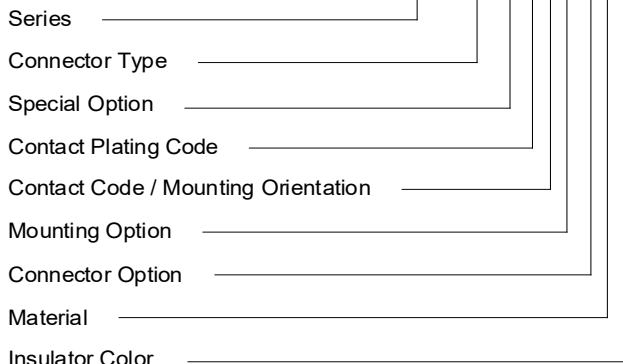

Series:

698A Receptacle

Connector Type:

106 USB Type-C (6 Pin)

Special Option:

- Standard
W Water Resistant

Contact Plating:

1 2µ" ~ 5µ" Gold
2 Gold Flash

Contact Code / Mounting Orientation:

6 Right Angle SMT
8 Mid Mount SMT

Mounting Option:

2 4 Through Hole Grounding Tabs

Connector Option:

2 Standard Body
6 Short Body

Material:

1 LCP

Insulator Color:

1 Black

Ordering Code Notes:

Only the following 3 part numbers are available:
698A106W182-611
698A106W282-611
698A106-162-211