

LED NUMERIC DISPLAY, 4 DIGIT
BL-Q36X-41
Features:

- Ø 9.2mm (0.36") Four digit and Over numeric display series.
- Ø Low current operation.
- Ø Excellent character appearance.
- Ø Easy mounting on P.C. Boards or sockets.
- Ø I.C. Compatible.
- Ø ROHS Compliance.


RoHS Compliance
Super Bright
Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv
Common Cathode	Common Anode	Emitted Color	Material	λ_p (nm)	Typ	Max	TYP.(mcd)
BL-Q36E-41S-XX	BL-Q36F-41S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	105
BL-Q36E-41D-XX	BL-Q36F-41D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	110
BL-Q36E-41UR-XX	BL-Q36F-41UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	155
BL-Q36E-41E-XX	BL-Q36F-41E-XX	Orange	GaAsP/GaP	635	2.10	2.50	105
BL-Q36E-41Y-XX	BL-Q36F-41Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	105
BL-Q36E-41G-XX	BL-Q36F-41G-XX	Green	GaP/GaP	570	2.20	2.50	110

Ultra Bright
Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part No		Chip			VF Unit:V		Iv
Common Cathode	Common Anode	Emitted Color	Material	λ_p (nm)	Typ	Max	TYP.(mcd)
BL-Q36E-41UHR-XX	BL-Q36F-41UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	155
BL-Q36E-41UE-XX	BL-Q36F-41UE-XX	Ultra Orange	AlGaInP	630	2.10	2.50	140
BL-Q36E-41YO-XX	BL-Q36F-41YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	140
BL-Q36E-41UY-XX	BL-Q36F-41UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	120
BL-Q36E-41UG-XX	BL-Q36F-41UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	140
BL-Q36E-41PG-XX	BL-Q36F-41PG-XX	Ultra Pure Green	InGaN	525	3.80	4.50	195
BL-Q36E-41B-XX	BL-Q36F-41B-XX	Ultra Blue	InGaN	470	2.70	4.20	120
BL-Q36E-41W-XX	BL-Q36F-41W-XX	Ultra White	InGaN	/	2.70	4.20	150

-XX: Surface / Lens color :


Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

LED NUMERIC DISPLAY, 4 DIGIT


BL-Q36X-41

Package configuration & Internal circuit diagram


BL-Q36x41 Series

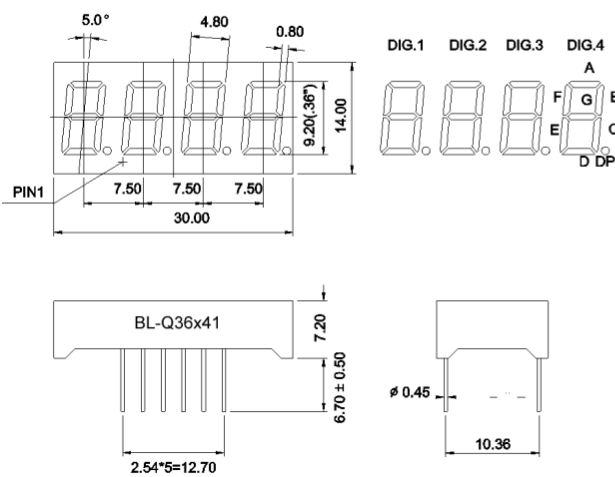

BL-Q36E41

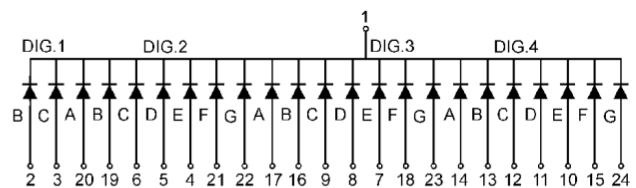

BL-Q36F41

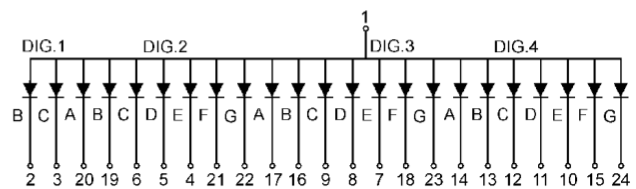

Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


LED NUMERIC DISPLAY, 4 DIGIT

BL-Q36X-41


Typical electrical-optical characteristics curves:




- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaAlSiC 525nm/Ultra Green

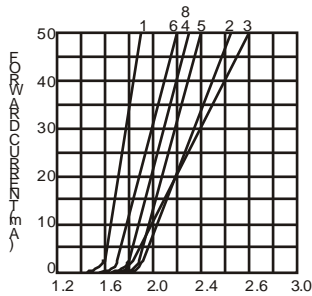

FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE

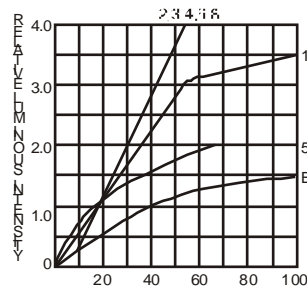

FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

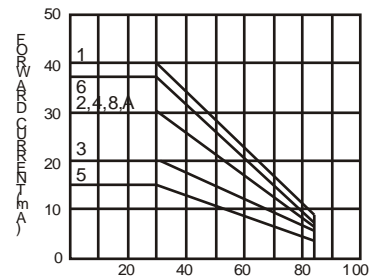

AMBIENT TEMPERATURE Ta (°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE



AMBIENT TEMPERATURE Ta (°C)



tp-PULSE DURATION μ S
(1,2,3,4,6,8,B,D,J,K)



(5)

NOTE: 25 free air temperature unless otherwise specified